

# INFINITY 9

## INFINITY SERIES

66 x 34 ½ x 31 ½ inches

AIR-WHIRLPOOL MODEL #WI9INF6636A



Not a drop-in model. Deck must be built around unit.

### FEATURES ~

- Raised seating
- Sculpted armrests
- Extra-soft magnetic comfort pillow
- Adjustable metal base
- Slip resistant floor
- Premium cast acrylic surface
- Limited lifetime warranty



### SYSTEM FEATURES (standard)

#### AIR-WHIRLPOOL COMBINATION

- Electronic control with preset capability
- 16 hydrotherapy jets
  - 12-jet heated-air shiatsu back massage system
  - Leg and foot jets
- Whirlpool pump
- 1.5kW inline maintenance heater
- High intensity LED chromatherapy light
- In-floor illusion air injectors
- Variable speed heated-air blower with wave and pulse modes
- Air system purge and dry cycle




Rev. 04.05.21

# INFINITY 9


66 x 34 1/2 x 31 1/2 inches



Not a drop-in model. Deck must be built around unit.  
This unit has a 3/4" female waterfall fill spout connection.

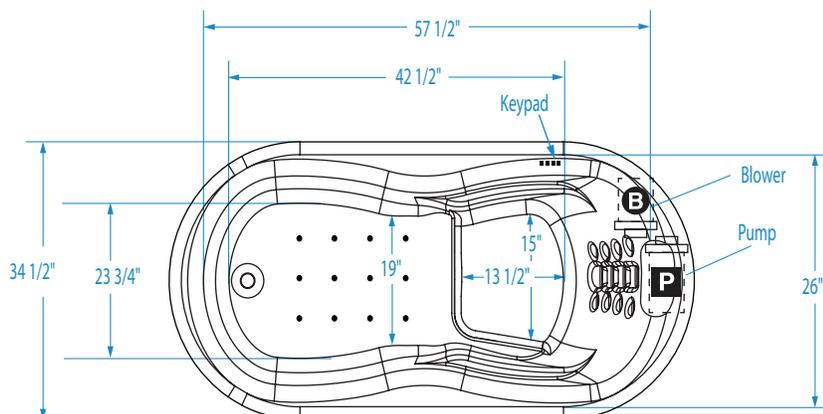


No alternate pump location available.

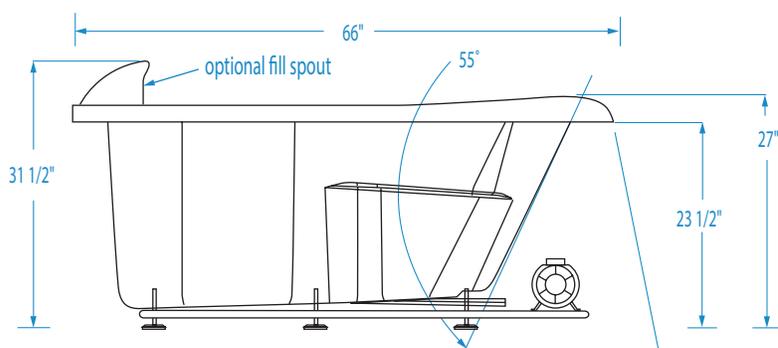

Note: Infinity 9 is not a drop in model.  
A deck must be built around the tub.

NOTE: Please allow for plumbing to extend approx. 3" beyond tub rim.



## FEATURES

Dimensional Tolerance ± 3/8". Dimensions needed for site preparation should be measured from the unit. Aquatic assumes no responsibility for preparatory work.

Type and Model #	Material	Jets	Pump	Air System	Blower	Heater	Controls	Drain	Pkg. Wt. lbs
Air-whirlpool #WI9INF6636A	Cast Acrylic	16	102 GPM	Injector	Variable speed	1.5 kw Inline	Electronic	Universal	289

## DIMENSIONS inches

Width Overall / Net	Depth Overall / Net	Height Overall / Net	Skirt Height
66	34 1/2	31 1/2 / 23 1/2	-

## SUMP DATA inches

Capacity to Overflow gal (ltr)	Min. Operating Capacity gal (ltr)	WIDTH @ centerline		DEPTH @ centerline	
		Top	Bottom	Top	Bottom
89	65	57 1/2	42 1/2	26	23 3/4

## PLUMBING DIMENSIONS inches

A	B	Drain Diameter / Clearance
2 1/2	8 3/4	

## ELECTRICAL DATA

Component	Specification	Requirement
Pump	9 AMP; 120 V	15 AMP 1 pole, separate circuit, Class A GFCI
Inline Heater	1.5 kW; 12.5 AMP; 120 V	15 AMP 1 pole, separate circuit, Class A GFCI
Blower	1.0 HP; 9.5 AMP; 120 V	15 AMP 1 pole, separate circuit, Class A GFCI

### NOTES:

1) Where applicable, utilize cut-out templates packed with unit for deck cutouts.

2) 16 x 16 minimum access required at pump/blower location(s).